



PRODUCTS 2019



A brand shaped by quality and innovation - Made in Germany

In the development and manufacture of opto-electronic consumer products, NOBLEX GmbH is continuing the proud tradition of the production facilities of Ernst Abbe and Carl Zeiss in Jena and, later, in Eisfeld in Thuringia.

A 150-year success story in optical devices points to a vast fund of experience in optics, mechanics, electronics and surface finishing. NOBLEX sees it both as an incentive and an obligation to continue this tradition deriving from Zeiss, Docter and Analytik Jena with passion and a spirit of innovation.

As a result of the acquisition of the innovative optic facility in Eisfeld, NOBLEX has also laid the foundation for a strategic partnership with Analytik Jena and provides the capacities for the manufacture of optical, analytic and bio-analytical systems on a long-term basis.

We cannot influence passion and timing, but the equipment. It is good to know that the hunter can rely on the equipment. Observational and target optics, which are characterised by highest quality standards, are developed at the production site of NOBLEX in Southern Thuringia. The interaction of opto-electronic know-how and fine mechanical precision form the basis of these high-performance products.



INDEX

TARGET OPTICS

NOBLEX riflescopes	6
Target optics - Multitop	8
NOBLEX® N6	10
NOBLEX® N6 comfort	16
NOBLEX® N6 comfort TAC IPSC	18
NOBLEX® N5	19
NOBLEX® N4 vario	20
Technical specifications at a glance	22
NOBLEX® sight – Reflex sights	24
NOBLEX® sight II plus	25
NOBLEX® sight III	26
NOBLEX® sight C	28
NOBLEX® sight Law Enforcement	30
NOBLEX® sight IPSC	31
NOBLEX® QUICKsight	32
NOBLEX® sight for GLOCK M.O.S. system	34
Accessories	35

LONG-RANGE OPTICS



NOBLEX long-range optics	36
NOBLEX binoculars engineering	38
NOBLEX® 7 × 40 10 × 42 B/GA	40
NOBLEX® mono 8 × 21	41
NOBLEX® 8 × 42 10 × 42	42
Technical specifications at a glance	43

NOBLEX riflescopes

An excellent performance

Top optical systems for hunting – Made in Germany

NOBLEX riflescopes are characterised by a superior optical and technological performance. Many years of experience in precision engineering and optics have spawned riflescopes which live up to the highest quality standards. The precise matching of mechanics and optical systems, paired with an excellent imaging performance turns NOBLEX riflescopes into reliable hunting companions on all continents of the world. Tubular bodies made of aviation aluminium and high-performance optical components are able to withstand extreme climatic conditions. Only 100% tested riflescopes leave the factory in Eisfeld. This assures a quality standard the criterions of which are defined by quality standard DIN EN ISO 9001:2015.

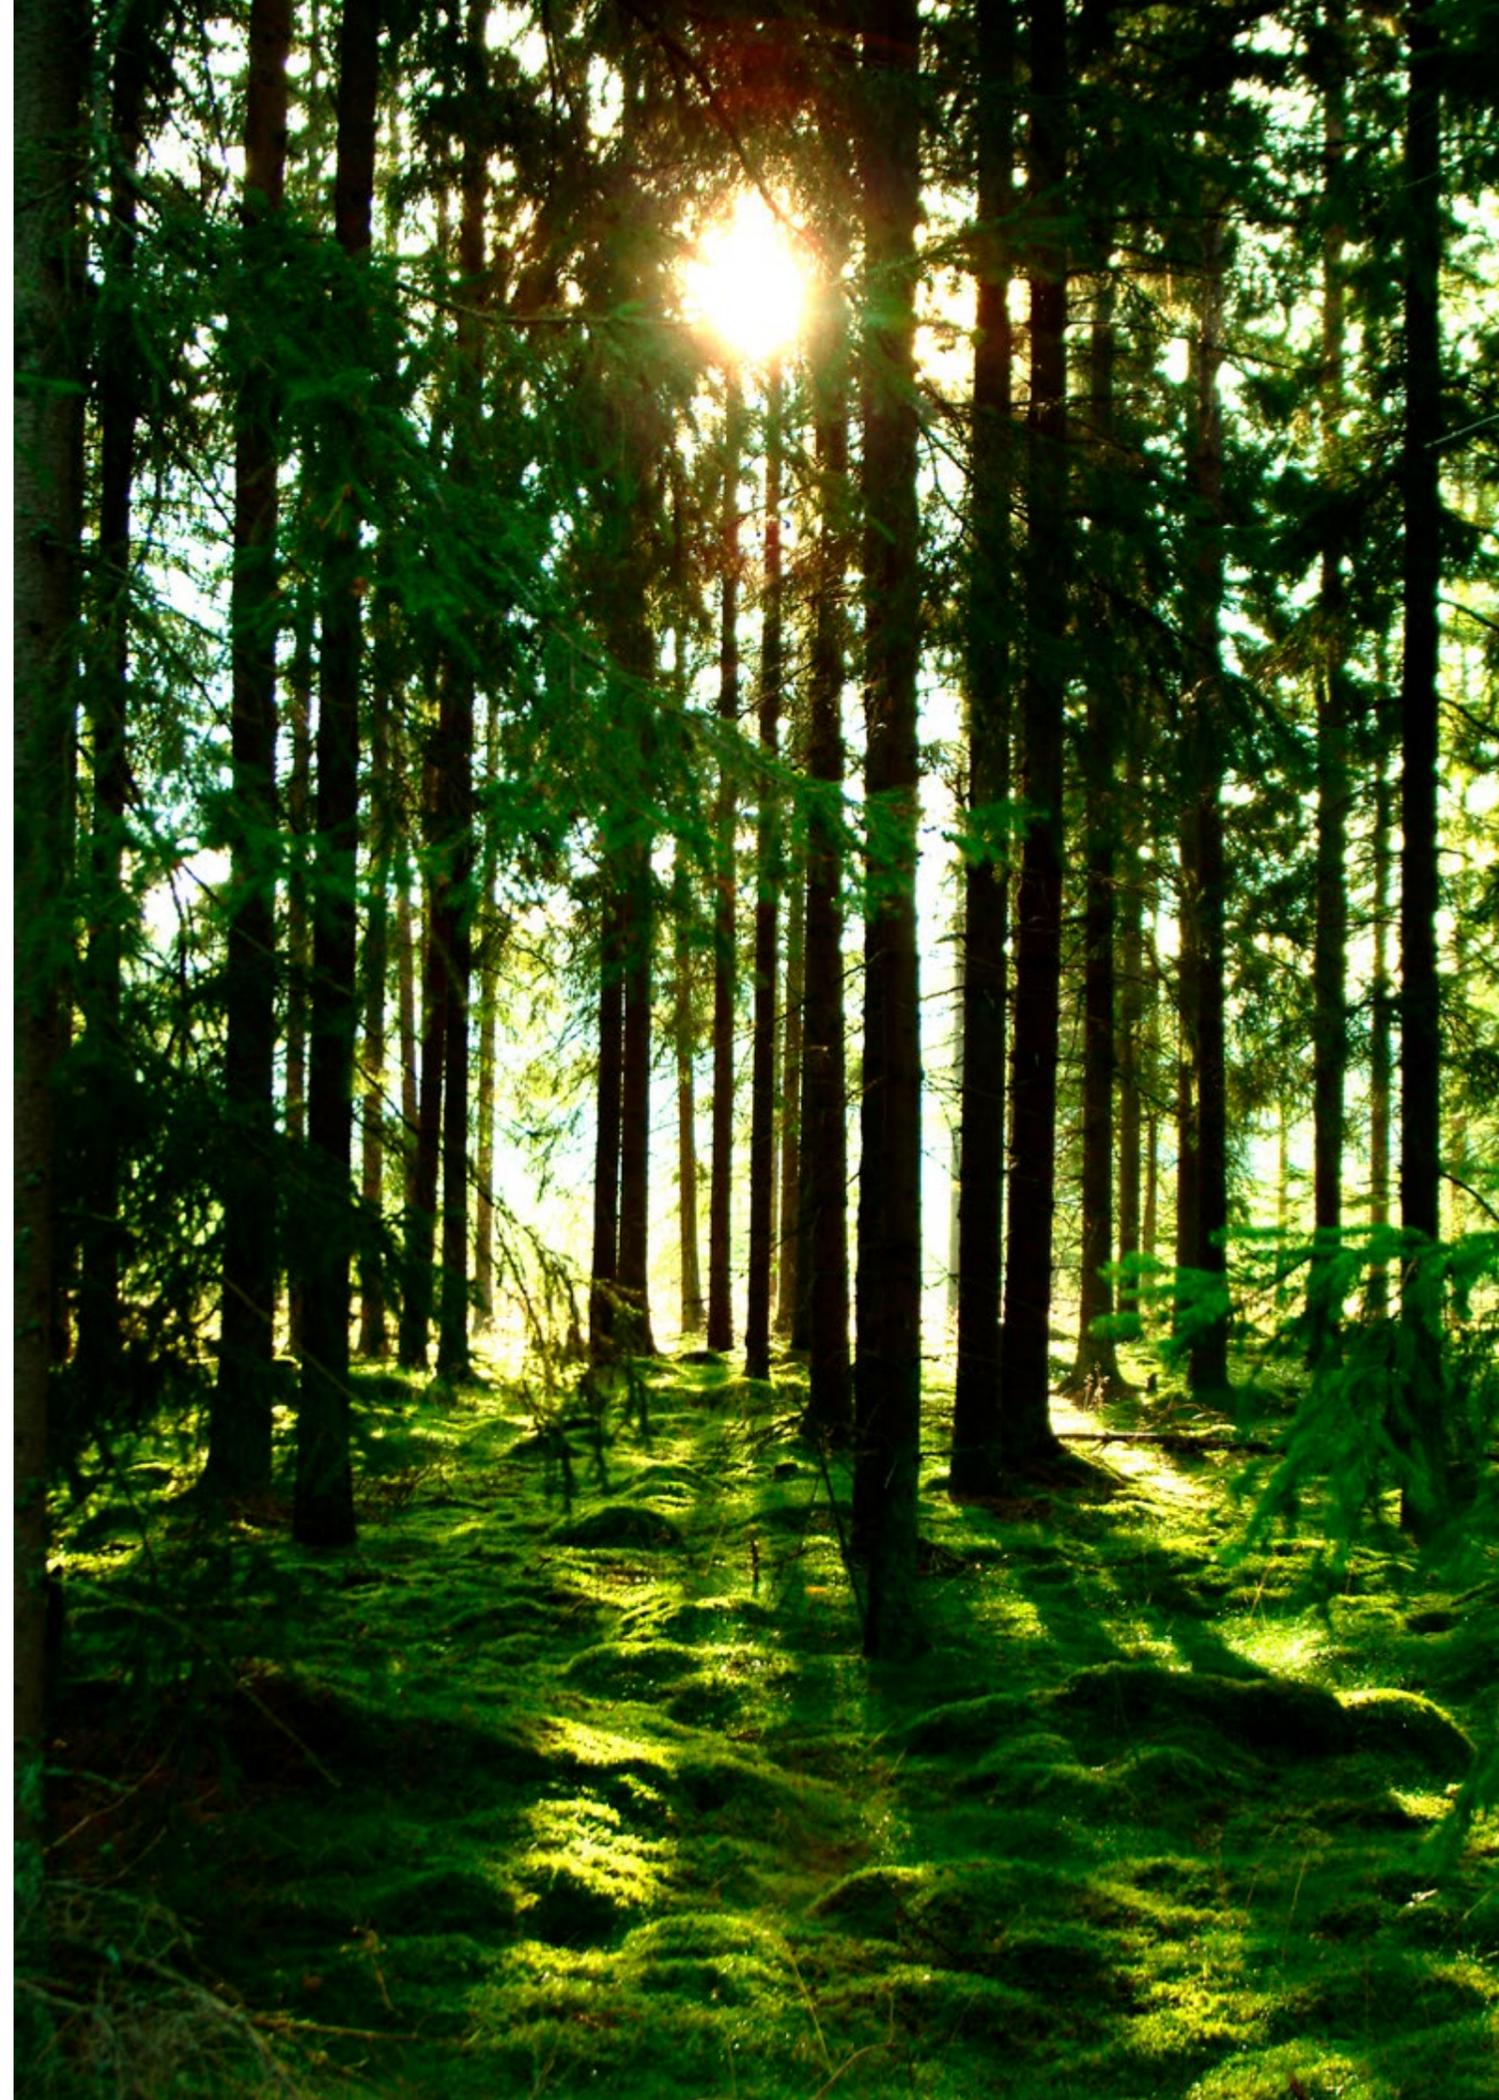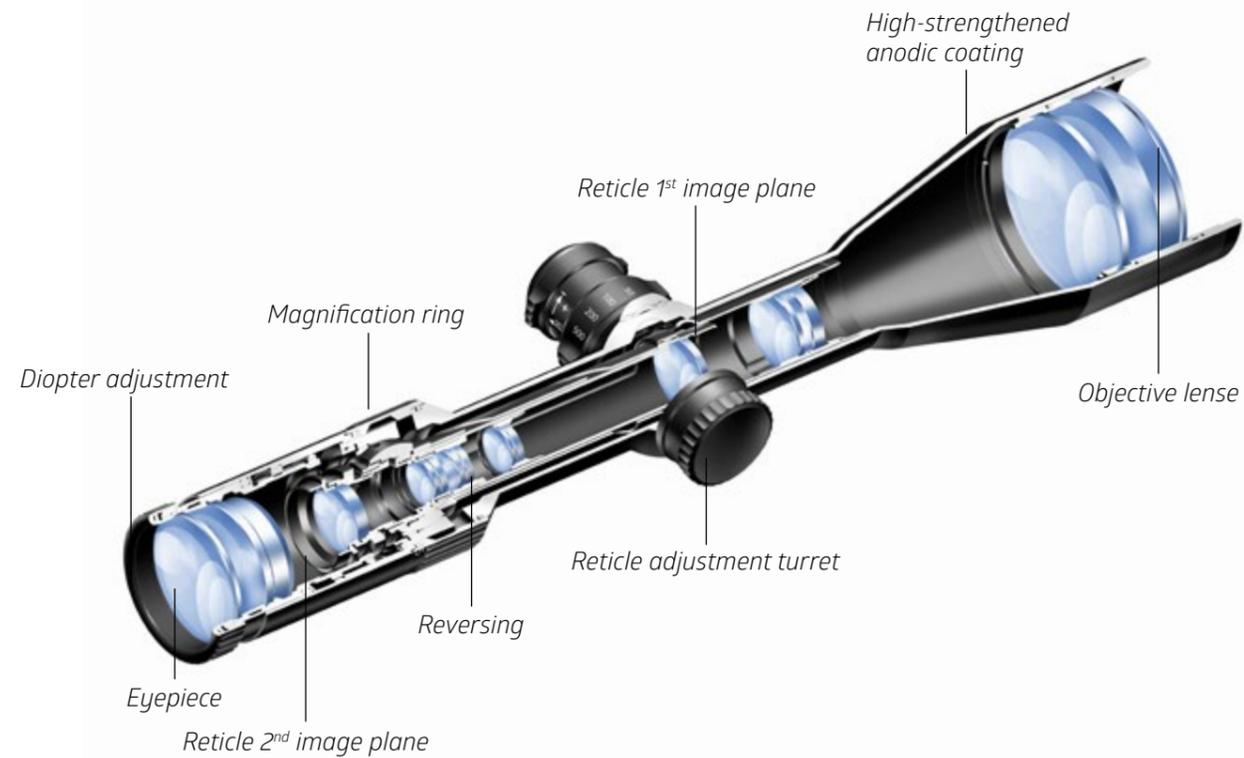


Multitop - Guarantees high transmittance under all lighting conditions

Hunting in the limit range between light and darkness – no situation places higher demands on your riflescope.

Only the use of the best glass materials in connection with highly efficient nano coating technology is the condition for maximum luminous efficiency. All optically effective glass surfaces are equipped with the especially developed transmittance coating multitop. This guarantees highest telescopic acuity of vision even at twilight and night as well as perfect brilliance and a transmittance of up to 95.1 %.



Transmittance measurement of a NOBLEX riflescope

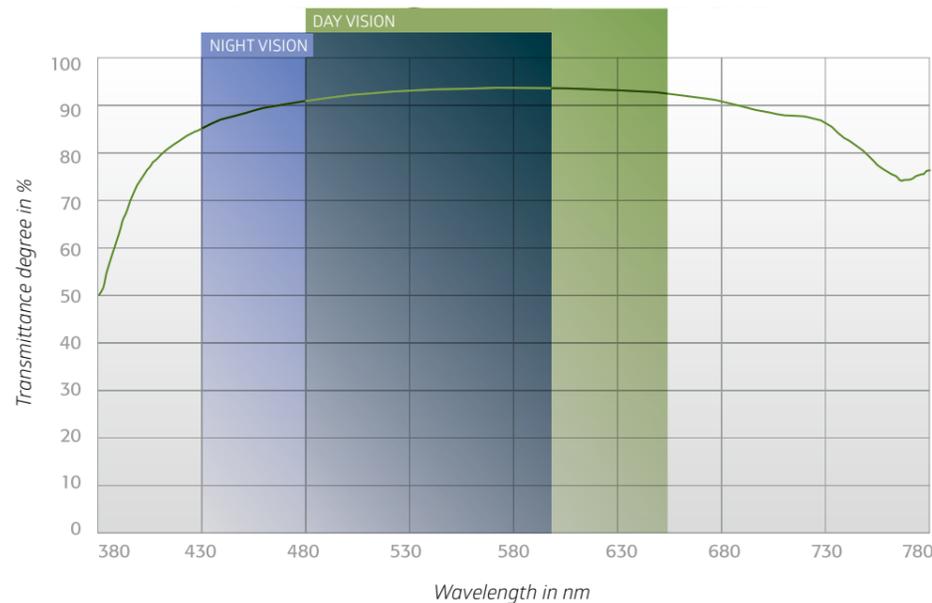

100 Hz Technology

NOBLEX uses its 100 Hz technology for all illuminated reticles. Thus, the electronics are synchronised in a way that a perfect, uniform reticle appears for the observer. Flicker-free, steady and easy on the eyes, thus you always keep the eye on the essentials even while observing through the target optics.

100 Hz

Developed for any situation

No matter where you are hunting, NOBLEX riflescopes are reliable companions. The tubular body made of aviation aluminium with a high-strength, resistant hard-anodised surface is dust- and pressure-tight, weatherproof and climate resistant.



Safety in use

We place great importance on your safety. For this reason, every NOBLEX riflescope is designed with a comfortably dimensioned eye distance. This gives you the certainty to be able to hunt effectively and safely even in case of strongly recoiling calibres or unfavourable firing positions.



NEW

NOBLEX® N6

Experience your passion at close range



NOBLEX® N6 2,5 – 15 × 56
The specialist for difficult situations.

Attention, concentration and flexibility are the basis for the hunting success. Good, if the hunter can rely on his equipment. With the V6 riflescope models NOBLEX offers all that is necessary for a successful hunt: a 6-fold zoom factor, large fields of vision for comfort and safety, superfine reticle with dimmable illuminated dot for most precise shots even at long distances as well as an intuitively operated illuminated dot control. State-of-the-art glass materials and coating technologies guarantee bright, high-contrast, sharply-contoured and brilliant images. The NOBLEX multi-clean (Dmcl) coating on the objective and eyepiece lenses lets water drip off and prevents dust and dirt particles from depositing.

NOBLEX® N6

Model	1-6 × 24	2-12 × 50	2,5-15 × 56
Field of vision (m/100 m)	37,5-6,25	18,75-3,13	15-2,5
Rail (optional)	Z-rail	Z-rail	Z-rail
Centre tube diameter (mm)	30	30	30
Weight (g)	530	660	750

NEW



1- 6 × 24 | The driven hunt specialist

The best of two worlds: This riflescope unites a reflex sight and a riflescope in one compact device. Thanks to the above-average zoom range, you are well prepared for mastering all driven hunt situations. The large fields of view on all magnification levels and the absolute precision even at greater distances contribute to this.



2 -12 × 50 | The all-rounder

This is how sovereignty feels like: Easy to handle and lightweight on stalking and for a mountain hunt, fast for raised hide on wild boars at night. Our all-rounder provides all properties hunters attach importance to – and like all NOBLEX products, this riflescope scores with brilliant optics and precisely worked mechanics.





2,5 -15 × 56 | The specialist for difficult situations

No way for 'no way': This riflescope proves its strength even under difficult conditions – e. g. if the light conditions or long distances make a precise shot impossible. The 56-mm objective lens diameter guarantees sufficient image brightness even at largest magnification and with the maximum 15-fold magnification, you will not miss any detail even at long distances. A continuously adjustable parallax compensation ensures highest precision in case of large shoot distances.

Finest reticle for precise shots

Even good things can be improved: To prepare the hunters for today's challenges of hunting in the best possible way, we have equipped all NOBLEX® V6 models with reticle 4i on the 2nd image plane – a further development of the proven reticle 4. Hair-thin lines guide your eye precisely to the aim point. It is kept in signal red and can be continuously adapted to all light conditions. Whether in the glistening sunshine or moonlight night – it is immediately detected by the shooter and guarantees a precise shot. The space around the aim point is designed sufficiently large to minimize distracting coverings.

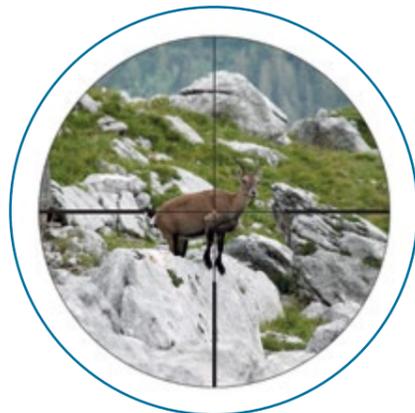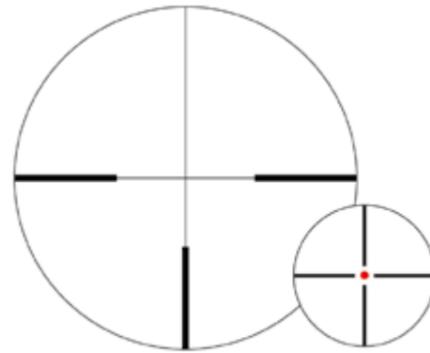

Low magnification



High magnification

Best reticle perceptibility with the lowest possible target covering guarantee a safe and successful hunt. The reticle 4i offers this combination in a perceptibly outstanding way.



Shiftcontrol illumination control

While hunting, one aspect is important: the focus on the essentials. Shiftcontrol stands for an intuitive and comfortable illumination control which requires only minimum effort: If the light conditions change, you can adapt your NOBLEX® V6 riflescope by one flick of the wrist to the environmental brightness. A continuously adjustably and silently working illumination control adapted to the physiology of the eyes ensures optimum detectability and strong contrasts under all light conditions.



Time-controlled switch-off

With the automatic shut-off, you are also saving resources: If the control is not operated for 180 minutes, the illumination switches off automatically – and, thanks to the integrated memory function, it is immediately available with the last brightness set after a reactivation.

Coverage values on 100 m

		Bar spacing	Bar thickness	Line thickness	Point thickness
Magnification	1,0 ×	15 m	37,5 cm	7,5 cm	15,0 cm
Magnification	2,0 ×	7,5 m	18,8 cm	3,8 cm	7,5 cm
Magnification	2,5 ×	6,0 m	15,0 cm	3,0 cm	6,0 cm
Magnification	6,0 ×	2,5 m	6,3 cm	1,3 cm	2,5 cm
Magnification	10,0 ×	1,5 m	3,8 cm	0,8 cm	1,5 cm
Magnification	12,0 ×	1,25 m	3,1 cm	0,6 cm	1,3 cm
Magnification	15,0 ×	1,0 m	2,5 cm	0,5 cm	1,0 cm

NEW

Personalised quick reticle adjustment (ASV) Safety at a long distance

The personalised quick reticle adjustment (ASV) for the V6 target scopes of NOBLEX allows a targeted and accurate shot, particularly at long and different distances. With the personalised quick reticle adjustment, the marksman always stays "on the spot" at any distance. For the V6 target scope with optionally available personalised ASV, an uncertain or estimated higher aiming point is a thing of the past. The uncomplicated ordering via a web-based document, the easy "plug and play" assembly, which is of course possible by the marksman himself, as well as the easy handling are the strengths of the personalised ASV for V6 target scopes of NOBLEX.


Whether in the mountains or in the African Savannah. Hunting at a long distance is always a great challenge. For precise shots, NOBLEX has equipped the highly-magnifying riflescope 2.5 – 15 × 56 with a parallax balancing. This offers a distance adjustment of 50 m to infinity (∞). The adjustment of the distance is performed continuously and silently. Two projecting gripping surfaces are positioned ergonomically and provided with an antislip surface structure. This facilitates to precisely adjust the respective distance with or without gloves.

Long-range shots make an adjustment of the reticle indispensable. The NOBLEX reticle adjustment works almost noiselessly. The precise steps are clearly discernible even with gloves. This facilitates to comfortably adjust the reticle even in aiming position, without losing sight of the target. The zero adjustable scale ring can be locked safely and allows an absolute repetition accuracy of the shooting adjustment position.



Multiclean Nanotechnology for a clear view

All NOBLEX® V6 riflescopes are equipped with the Multiclean lens coating. The efficient protective coating for the lens surface significantly reduces the soiling of the lens. All kinds of dirt deposit less and can be removed quickly, easily and without streaks. Whether you are hunting in the rain, snow or the African Savannah, you will always have a clear view with this technology.

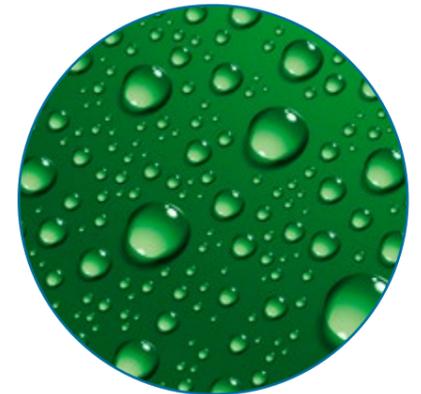

The well-proven Z-inside rail

All NOBLEX® V6 riflescopes are available with the well-proven Z-inside rail. Identical in construction with the Zeiss inside rail, this mounting version demonstrates absolute functionality, aesthetics and a shot-proof fit.



NOBLEX® N6 comfort

With a focus on the essentials



NOBLEX® N6 comfort 1-6 × 24


The NOBLEX comfort technology combines the well-established automatic reticle illumination control of the NOBLEX sight with a riflescope for the special requirements of drive hunting. The aim is to allow the marksmen to focus completely on the hunting situation. In the aiming position, the reticle is immediately ready for use and is always set to the correct intensity. There is no need for continuous manual readjustment. The sensor performance is adapted to the physiological eye sensitivity and thus prevents an over-illumination of the target by the reticle. If necessary, the reticle intensity can also be adjusted manually to your personal perception.

NOBLEX® N6 comfort

Model	1-6 × 24
Field of vision (m/100 m)	37,5-6,25
Rail (optional)	Z-rail
Centre tube diameter (mm)	30
Weight (g)	530

NOBLEX® N6 comfort

auto intense control

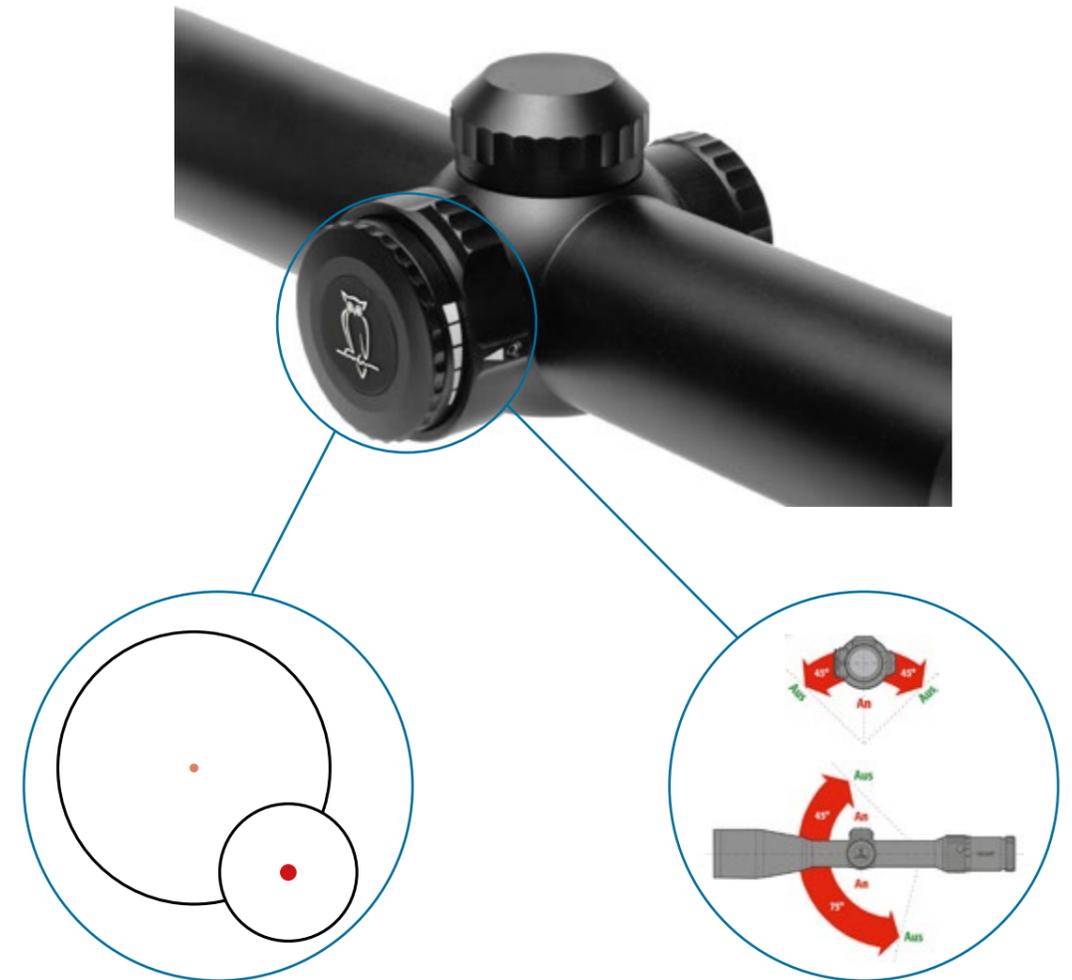

auto intense illumination control

The auto intense illumination control detects the brightness in the target area and calculates the perfect reticle brightness within fractions of a second. The status of the power supply is continuously detected. In case of low battery voltage, a recommended battery change is indicated via a flashing signal of the reticle.

position sensor

If the weapon is not used and thus placed down, the integrated position sensor switches off the reticle automatically. Switch-off is carried out in vertical position if the angle is larger than +45° and -75° and for the horizontal position larger than ± 45°.

NEW

NOBLEX® N6 comfort TAC IPSC



NOBLEX® N6 comfort TAC IPSC 1-6 × 24

For the first time, NOBLEX offers the well-established, automatic reticle illumination control of the NOBLEX® sight in a superzoom sport riflescope. The aim is to allow the marksmen to focus completely on the sportive competition. In the aiming position, the red dot is immediately ready for use and is always set to the correct intensity. There is no need for continuous manual readjustment. The auto intense lighting control detects the brightness in the target area and calculates the perfect red dot brightness within fractions of a second. The sensor performance is adapted to the physiological eye sensitivity and thus prevents an over-illumination of the target by the reticle. If necessary, the red dot intensity can also be adjusted manually to your personal perception.



NOBLEX® N6 comfort TAC IPSC

Model	1-6 × 24	1-6 × 24
Field of vision (m/100 m)	37,5-6,25	37,5-6,25
Rail (optional)	Z-rail	Z-rail
Centre tube diameter (mm)	30	30
Weight (g)	530	530
Colour	Black	Flat Dark Earth

NOBLEX® N5


The all-rounder for daily use



NOBLEX® N5 3-15 × 56

The all-rounder for daily work. The N5 „plays in its own league“ - unbeatable value for money. Like all other NOBLEX sighting optics, this 5 × zoom riflescope is manufactured entirely in Thuringia.

- Monoblock production guarantees perfect stability
- Button-controlled, stepless adjustment of red dot intensity
- Optimal usable eye relief

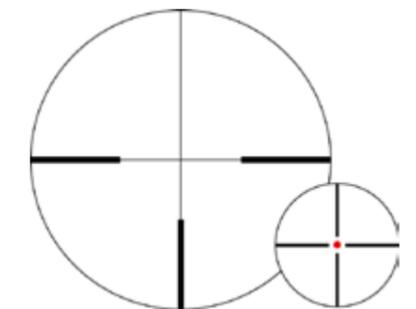

Reticle 4i

NOBLEX® N5

Model	1,2-6 × 24	2,4-12 × 50	3-15 × 56
Field of vision (m/100 m)	36,3-6,9	17,4-3,5	13,8-2,8
Centre tube diameter (mm)	30	30	30
Weight (g)	470	600	690

NOBLEX® N4 vario

Everything you need in a riflescope



NOBLEX® N4 vario 2,5-10 × 50

Functional, robust, shockproof, climate resistant, high contrast, brilliant, sharply defined edges. Qualities that distinguish modern high-performance scopes. NOBLEX® N4 is the name for riflescopes with these qualities. NOBLEX® N4 riflescopes are the basis for a solid hunting experience. They combine optical and mechanical precision with an intuitive operating concept. The various models cover a broad spectrum, from flush hunting scopes to all-round scopes and high-power raised hide riflescopes.

NOBLEX® N4 vario

The reticle models 0 and 4 – 0



The combination of bar reticle of the first image plane and the dimmable daylight illuminated reticle of the second image plane turn the riflescopes into an optimal companion for many hunting methods. The bar reticle of the first image plane facilitates estimating distances in all magnification levels. Thereby the horizontal distance between the bars is 140 cm at 100 m.




For the use in drive or big-game hunting, the traditional bar reticle has not been applied. The marksman can dispose of the full field of view without any irritating coverings by the bars.

NOBLEX® N4 vario

Model	2,5-10 × 50	3-12 × 56
Field of vision (m/100 m)	12,4-42	9,4-3,5
Centre tube diameter (mm)	30	30
Weight (g)	660	700

Technical specifications at a glance

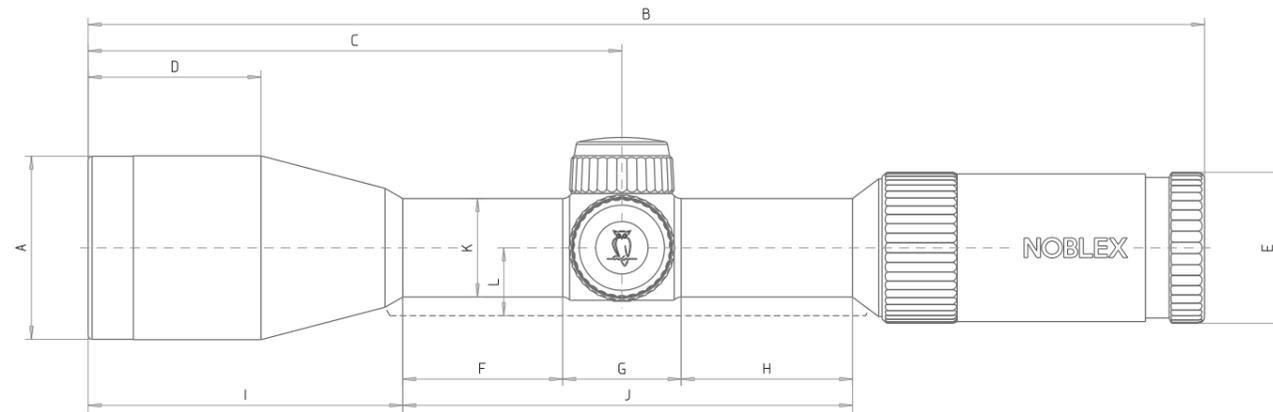

Dimensions of overall length and diameters

	A	B	C	D	E	F	G	H	I	J	K	L
NOBLEX® N6 comfort												
1-6 × 24	30	287	109	-	46	92	34	53	-	179	30	22
NOBLEX® N6												
1-6 × 24	30	287	109	-	46	92	34	53	-	179	30	22
2-12 × 50	56	342	164	60	46	46	34	53	101	133	30	22
2,5-15 × 56	62	362	185	54	46	50	34	53	118	137	30	22
NOBLEX® N5												
1,2-6 × 24	24	274	94	-	46	78	34	55	-	166	30	-
2,4-12 × 50	50	33	149	48	46	45	34	55	87	134	30	-
3-15 × 56	56	356	176	42	46	45	34	55	114	134	30	-
NOBLEX® N4 vario												
2,5-10 × 50	56	345	168	53	41	41	30	70	112	141	30	20,7
3-12 × 56	62	376	199	58	41	53	30	70	131	153	30	20,7

* The length specifications are measured at zero position of the dioptre adjustment.
 1. Connection dimensions filter thread of NOBLEX® N6 comfort 1-6 × 24: M 27 × 0,75
 2. Connection dimensions filter thread of NOBLEX® N6 1-6 × 24: M 27 × 0,75
 3. Connection dimensions filter thread of NOBLEX® N6 2-12 × 50: M 52 × 0,75
 4. Connection dimensions filter thread of NOBLEX® N6 2,5-15 × 56: M 58 × 0,75

5. Connection dimensions filter thread of NOBLEX® N5 1,2-6 × 24: M 27 × 0,75
 6. Connection dimensions filter thread of NOBLEX® N5 2,4-12 × 50: M 52 × 0,75
 7. Connection dimensions filter thread of NOBLEX® N5 3-15 × 56: M 58 × 0,75
 8. Connection dimensions filter thread of NOBLEX® N4 vario 2,5-10 × 50: M 52 × 0,75
 9. Connection dimensions filter thread of NOBLEX® N4 vario 3-12 × 56: M 58 × 0,75

Technical specifications at a glance

MODEL	Magnification	Ø Lens aperture (mm)	Ø Exit pupil (mm)	Field of vision (m/100 m)	Field of vision in degrees	Twilight performance	Adjustment per click (cm/100 cm)	Max. adjustment range (cm/100 m)	Dioptre adjustment range (dtp)	Ø Centre tube (mm)	Length at zero position (mm)	Mass without rail (g)	Mass with rail (g)
NOBLEX® N6 comfort													
1-6 × 24	1 × bis 6 ×	24	11,1 - 4,0	37,5 - 6,25	21,2 - 3,58	4,9 - 12	1,0	H: ±185 S: ±185	±3,0	30	287	530	555
NOBLEX® N6													
1-6 × 24	1 × bis 6 ×	24	11,1 - 4,0	37,5 - 6,25	21,2 - 3,58	4,9 - 12	1,0	H: ±185 S: ±185	±3,0	30	287	530	555
2-12 × 50	2 × bis 12 ×	50	11,1 - 4,2	18,75 - 3,13	10,71 - 1,79	10 - 24,5	1,0	H: ±130 S: ±185	±3,0	30	342	660	680
2,5-15 × 56	2,5 × bis 15 ×	56	11,1 - 3,7	15,0 - 2,5	8,58 - 1,43	11,8 - 29	1,0	H: ±100 S: ±60	±3,0	30	362	750	760
NOBLEX® N5													
1,2-6 × 24	1,2 × bis 6 ×	24	10,6 - 4	36,3 - 6,9	20,57 - 3,95	5,4 - 12	10	±240	±3,0	30	274	470	-
2,4-12 × 50	2,4 × bis 12 ×	50	10,6 - 4,2	17,4 - 3,5	9,94 - 2,0	11 - 24,5	10	±120	±3,0	30	330	600	-
3-15 × 56	3 × bis 15 ×	56	10,6 - 3,7	13,8 - 2,8	7,90 - 1,60	13 - 29	10	±100	±3,0	30	356	690	-
NOBLEX® N4 vario													
2,5-10 × 50	2,5 × bis 10 ×	50	15,0 - 4,9	12,4 - 4,2	7,1 - 2,4	7,1 - 21,9	1,0	125	±2,5	30	345	640	660
3-12 × 56	3 × bis 12 ×	56	15,0 - 4,7	9,4 - 3,5	5,4 - 2,0	8,5 - 25,9	1,0	100	±2,5	30	376	680	700

Subject to technical changes.

- The devices are adjusted to a parallax-free observation distance of 100 m. This does not apply for the so-called »wild boar scope«. Here the parallax-free observation distance is 50 m.
- All devices are filled with nitrogen.
- All models with screwed on caps are waterproof.
- The middle eye relief of NOBLEX® N4 vario is 8 cm.
- The middle eye relief of NOBLEX® N5 and N6 is 9,5 cm.

NOBLEX® sight – Reflex sights

The original

Small, fast, accurate

Reflex sights are the opto-electronic revolution in sights engineering. As an enhancement of the traditionally open sight, they unite the advantages of conventional target acquisition with optical and electronic high-tech components.

The NOBLEX® sight is exemplary for the combination of a high-performance optical system with precision engineering and state-of-the-art electronics.

Developed for the fast shot, NOBLEX® reflex sights fully meet the requirements on their special application. The specifically computed, patented optical system supplies a simple magnification and a clear image without distortions. The high-quality NOBLEX multitop optical system coating provides a reflex-free image, in particular under extreme lighting conditions.

The NOBLEX® sight guarantees a high degree of safety during firing. Due to the single magnification, it is possible to sight with both eyes. The marksman thus obtains his maximum field of vision and an overview in all situations. The illuminated dot that is set to a parallax-free distance of 40 m assists the marksman in safe aiming, in particular during stressful hunting situations.

The typical NOBLEX tubeless design turns these reflex sights into ideal exchangeable optical systems. As they are extremely small, light and compact they can be taken along anywhere and are quickly mounted on the weapon when they are needed.



NOBLEX® sight II plus

Suitable for all pistols and rifles



Made in Germany



Hunters, target shooters and authorities around the world appreciate the advantages of this reflex sight. After having been mounted thousands of times and having stood test of time under extreme conditions, the NOBLEX® sight II plus is setting standards.

The NOBLEX® sight II plus unites

- Instant readiness for action when the protective cap is removed
- Robust housing made of hard-anodized aluminium alloys
- Two-lens high-performance optical system with internal reflex coating
- Precise, infinitely adjustable reticle adjustment without play
- Automatic control of illuminated dot intensity
- Anatomically adapted brightness progression of the illuminated dot
- Low construction height, low weight
- Easily mounted thanks to a large number of mounting adapters
- Battery life up to 28,000 hours
- Shockproof on all calibers

NOBLEX® sight II plus

Model	3.5 MOA	7.0 MOA
Parallax balance	40 m	40 m
Reticle adjustment range cm/100 m (height × side)	720 × 540	720 × 540
Illuminated dot coverage cm/100 m	10	20
Illuminated dot intensities	1/Automatic	1/Automatic
Dimensions (L × W × H) in mm	46 × 25,4 × 23,7	46 × 25,4 × 23,7
Weight (g)	25	25

NOBLEX® sight III

The next generation of reflex sights



Innovation is the road to success – this has also been true for the NOBLEX® sight III. The next generation of reflex sights unites hunting, sport and tactical requirements in one appliance.

- High-strength monoblock housing made of special aluminium
- Waterproof*
- Precise, infinitely adjustable reticle adjustment without play
- Two-lens high-performance optical system with internal reflex coating
- Sharp dot image across the entire field of vision thanks to additional correction lens
- Three magnet-controlled illuminated dot intensities can be selected
- Automatic illuminated dot regulation depending on the surrounding brightness
- Anatomically adapted brightness progression of the illuminated dot
- Suitable for night vision
- Battery indicator
- Control cap with safety strap eyelet
- Easily mounted thanks to a large number of mounting
- Shockproof on all calibers
- Suitable for all pistols and rifles


* in connection with the mounting plate

NOBLEX® sight III

Model	3.5 MOA	7.0 MOA
Parallax balance	40 m	40 m
Reticle adjustment range cm/100 m (height x side)	720 x 540	720 x 540
Illuminated dot coverage cm/100 m	10	20
Illuminated dot intensities	3/Automatic	3/Automatic
Dimensions (L x W x H) in mm	46 x 25,4 x 24,3	46 x 25,4 x 24,3
Weight (g)	25	25

Innovation magnetic control

So as to be able to cope with special tasks, the NOBLEX® sight III is equipped with high-performance electronic engineering in miniature format. The three-stage intensity control of the reticle brightness is effected without switch by means of an innovative operating concept. An integrated magnetic sensor reacts to the magnetic transmitter inside the control cap and triggers the reticle brightness change. Within the intensity stage set, the light sensor automatically reacts to the surrounding brightness and dims the reticle according to the physiological perceptibility of the human eye.

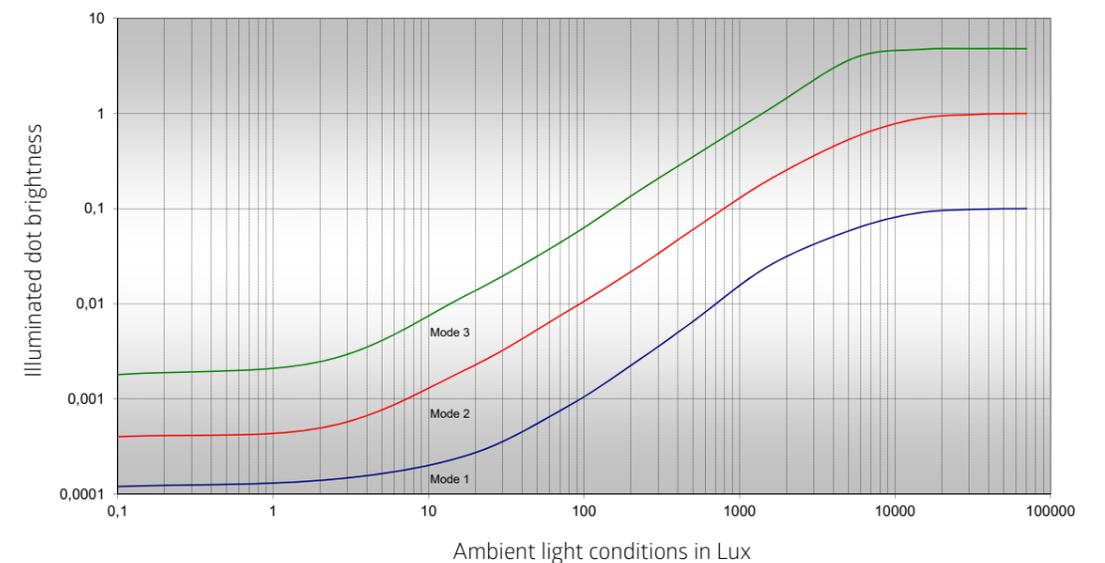

NOBLEX® sight C

The colours of nature



NOBLEX® sight C

Colour is more than just a specific part of the visible light: Colour transmits messages; it is an expression of personality and triggers most diverse emotions. They are either used deliberately to attract attention or to optically blend into the environment. The new coating technology for the casing of Cerakote™ impresses with an excellent corrosion protection, outstanding abrasion resistance, extreme hardness and unmatched durability. NOBLEX SPORT OPTICS recommends the NOBLEX® sight C for the use on rifles and revolvers.

NOBLEX® sight C all Colours

Model	3.5 MOA	7.0 MOA
Parallax balance	40 m	40 m
Reticle adjustment range cm/100 m (height × side)	720 × 540	720 × 540
Illuminated dot coverage cm/100 m	10	20
Illuminated dot intensities	3/Automatic	3/Automatic
Dimensions (L × W × H) in mm	46 × 25,4 × 24,3	46 × 25,4 × 24,3
Weight (g)	25	25

The right sight for every use



- For each requirement the right colour
- Extremely weather-resistant due to the Cerakote™ coating
- Perfect protection due to softcover coverage with integrated airbag system
- Instant readiness for action when the protective cap is removed
- High-strength monoblock housing made of special aluminium
- Two-lens high-performance optical system with internal reflex coating
- Sharp dot image thanks to additional correction lens
- Precise, infinitely adjustable reticle adjustment without play
- Automatic control of the illuminated dot intensity
- Easily mounted thanks to a large number of mounting adapters

NEW

NOBLEX® sight Law Enforcement

Safety and success in action



Made in Germany

NOBLEX® sight Law Enforcement

Specially designed with special features for tough use by police, army and special forces. The safety of the operational forces is the ultimate goal in every operation. The right equipment determines the success of a mission. Reliable, practical, durable and intuitive are just some of the attributes that describe the NOBLEX® sight Law Enforcement. Developed for a quick shot, NOBLEX® reflex sights with integrated mounting for Weaver / Picatinny rails are perfect for the use as BACK UP sights.

NOBLEX® sight Law Enforcement

Model	3.5 MOA	7.0 MOA
Parallax balance	40 m	40m
Reticle adjustment range cm/100 m (height x side)	720 x 540	720 x 540
Illuminated dot coverage cm/100 m	10	20
Illuminated dot intensities	1/Automatic	1/Automatic
Dimensions (L x W x H) in mm	46 x 25,4 x 23,7	46 x 25,4 x 23,7
Weight (g)	25	25

NOBLEX® sight IPSC

Developed by sport shooters for sport shooters



Made in Germany

NOBLEX® sight IPSC

Compact and robust red dot sight with a particularly bright spot, available in 3.5 and 7.0 MOA. It is designed for the sportive pistol or shotgun shooting and other dynamic sport shooting disciplines of the IPSC.

NOBLEX® sight IPSC

Model	3.5 MOA	7.0 MOA
Parallax balance	25 m	25 m
Reticle adjustment range cm/100 m (height x side)	720 x 540	720 x 540
Illuminated dot coverage cm/100 m	10	20
Illuminated dot intensities	3/Automatic	3/Automatic
Dimensions (L x W x H) in mm	46 x 25,4 x 24,3	46 x 25,4 x 24,3
Weight (g)	25	25

NOBLEX® QUICKsight

The flattest shotgun sight in the world



Made in Germany

NOBLEX® QUICKsight
Revolutionary in every Respect

For the first time we are presenting a reflex sight in a closed design. For this, however, we set aside the otherwise usual tubular design. The result is the flattest and smallest reflex sight. The blend of different optical components to a compact, effective unit guarantees a truly unchanged perspective. The housing made of steel and the closed design make it resistant towards tough use and climatic influences. The QUICKsight has been developed especially for the use on shotguns with ventilated rails. The revolutionary design facilitates an extremely flat mount. With a sight axle of only 8.5 mm above the slide rail, it is the lowest building reflex sight in the world. The red target dot is parallax-free. The mount of the QUICKsight is possible on ventilated shotgun rails with a width of up to 10 mm. Due to the extremely flat design a shooting adjustment is not necessary.

Shotgun shooting newly defined

- Lowest building reflex sight of the world
- Line of sight only 8.5 mm above slide rail
- Best imaging properties
- Sight in closed design without »tunnel vision«
- Plug and Play concept
- Parallax-free



NOBLEX® QUICKsight

Model	5.0 VR
Parallax balance	25
Window size (W × H) in mm	19 × 7,6
Illuminated dot coverage cm/100 m	5 MOA (3,6 cm at 25 m)
Illuminated dot intensities	Automatic brightness adjustment
Dimensions (L × W × H) in mm	46 × 25,4 × 16,5
Weight (g)	37

NEW

NOBLEX® sight for GLOCK M.O.S. system

The first reflex sight integrated in the weapon



The first reflex sight integrated in the weapon. The fusion of handgun and optics into a compact, effective unit guarantees an absolutely unadulterated view. The steel housing and the closed construction make it insensitive to heavy use. NOBLEX® GLOCK sight for M.O.S. system was initially developed for the use on GLOCK weapons. The revolutionary construction allows extremely flat mounting. With a sighting axis of just 8.5 mm above the track, it is the lowest-mounted reflex sight in the world. The red visor dot is parallax free and has an automatic intensity control.



NOBLEX® sight for GLOCK M.O.S. system

Model	5 MOA
Parallax balance	25
Window size (W × H) in mm	19 × 7,6
Illuminated dot coverage cm/100 m	5 MOA
Illuminated dot intensities	automatically from night to daylight
Dimensions (L × W × H) in mm	49 × 25,6 × 5,1
Weight (g)	34

Accessories

NOBLEX® sight

NOBLEX® sight: Selection of cover caps



Cover cap
NOBLEX® QUICKsight



Cover cap
NOBLEX® sight II



Control / cover cap
NOBLEX® sight III



Cover cap
NOBLEX® sight C

NOBLEX® sight: Selection of assembly modules

Rifles and Shotguns



compact-SM mod. 93



Weaver



16 mm



19,5 mm



14 mm



SEM



EAW-SM



GFM

Handguns



Sig Sauer



S & W



CZ 75/85



H & K Expert



Colt



Glock



H & K USP



neutral



BO-Mar

Further mounts on request

NOBLEX long-range optics



NOBLEX binoculars breathe an air of tradition and modern times. The production site of Noblex in Southern Thuringia is where observation optics characterised by high quality standards come into being. The interaction of optical know-how and fine mechanical precision form the basis for these high-performance products.



NOBLEX binoculars engineering

NOBLEX binoculars are available in two prism designs: roof and porro prism.

Roof prism binoculars - also called straight view binoculars, permit a slender design. Due to the prism alignment, eyepiece and lens are arranged in on line (straight view).

Porro prism binoculars prism binoculars exhibit a very compact overall length and ergonomically convenient handling due to the 90° angular offset of their prisms. The prism alignment permits an enlargement of the lens distance and thus a more spatial impression, which particularly fascinates in case of the ASPECTEM.

Both design principles guarantee the highest degree of transmission, brilliance, colour fidelity, contrast and edge definition.

Focussing

NOBLEX binoculars are equipped with different focussing versions. The range comprises models with central focussing (CF) or individual focussing (IF).



NOBLEX lenses

The use of NOBLEX lenses guarantees a true to original colour reproduction and an increased sense of contrast. The picture seems clearer, more focussed and spatial. Special NOBLEX lenses reduce the colour fringes, thus guaranteeing a high degree of detail perceptibility.



with ordinary lenses



with NOBLEX lenses

Suitable for spectacle wearers

NOBLEX binoculars have a large eye relief distance, which makes them particularly suitable for spectacle wearers. The entire field of vision is available to spectacle wearers. The individual binocular-eye-distances can be adjusted, either by turning over the rubber eye cup or by twisting the »twist up« eyepieces in three latching steps.



NOBLEX® 7 × 40 | 10 × 42 B/GA

A legend in binoculars construction



NOBLEX® 7 × 40 B/GA
Overcoming Limits

Produced 100,000 times. 100,000 times in use by official and private users. Apart from their excellent optical performance, the models of the NOBLEX B/GA line are characterised by their extreme sturdiness in respect of mechanical and climatic environmental influences. These binoculars were developed and produced according to highest user standards and can thus also be used in areas where other binoculars are stretched to their limits. The advantages of the roof prism design manifest themselves in particular in the compact design and handy shape. The use of high-performance lenses with specially developed coating layers achieves peak values as far as resolution, edge definition, contrast and brilliance are concerned. The robust, shock-absorbing rubber sheathing reliably and safely protects the lenses and mechanical system that are designed for extreme stresses.

NOBLEX® 7 × 40 | 10 × 42 B/GA

Model	7 × 40 B/GA	10 × 42 B/GA
Optical system	Roof prism	Roof prism
Exit pupil longitudinal distance (mm)	20	20
Twilight performance	16,7	20,5
Close focus range (m)	5,0	9,7
Field of vision (m/1000 m)	131	100
Filling	Nitrogen	Nitrogen
Weight (g)	980	1090

NOBLEX® mono 8 × 21

The binoculars for the waistcoat pocket



NOBLEX® mono 8 × 21
Top class optics in miniature format

The NOBLEX® mono 8 × 21 is optimally suited for travelling, at work and at all kinds of events, for golfers and marksmen. Every time a detail offers unexpected opportunities, these tried and trusted compact binoculars are constant companions which are quick to hand. They can also double up as first-class opera glasses. Small and handy enough to fit into every pocket, these miniature binoculars convince with their unequalled optical performance. Brilliance, edge definition and the unique handling guarantee pure joy during observation. The NOBLEX® mono 8 × 21 is also available in the special colours blue and pink.

NOBLEX® mono 8 × 21

Model	8 × 21 mono
Optical system	Porro prism
Exit pupil longitudinal distance (mm)	9
Twilight performance	13
Close focus range (m)	2
Field of vision (m/1000 m)	110
Filling	-
Weight (g)	80

NEW

NOBLEX® 8 x 42 | 10 x 42

Experience a wide-angled view of nature



NOBLEX® 8 x 42

The light binoculars for stalking trekking and outdoor

The NOBLEX binocular models with 42-mm lens opening convince by their functional design. An open hinge connects the two halves of the binoculars. The »through grip« allows you to conventionally hold the binoculars with one hand, while simultaneously operating the focussing mechanics. The sturdy, water-pressure tight and yet light housing offers maximum protection to the lenses and mechanical components inside. The high-performance lenses guarantee an impressive viewing experience with brilliant, sharply contoured and highly contrasting imaging.

NOBLEX® 8 x 42 | 10 x 42


Model	8 x 42	10 x 42
Optical system	Roof prism	Roof prism
Exit pupil longitudinal distance (mm)	19,5	15,5
Twilight performance	18,3	20,5
Close focus range (m)	2,5	2,5
Field of vision (m/1000 m)	115	105
Filling	Nitrogen	Nitrogen
Weight (g)	670	680

Technical specifications at a glance

MODEL	Magnification	Ø Lens aperture (mm)	Ø Exit pupil (mm)	Exit pupil distance (mm)	Pupil distance (mm)	Twilight performance	Close focus range (m)	Field of vision m/1000m	Focussing	Water tightness (m)	Dioptr adjustment (dpt)	Max. width (mm)	Max. height (mm)	Weight (g)
Straight view binoculars														
7 x 40 B/GA	7 x	40	5,7	20	56-78	16,7	5,0	131	IF	1	7	147	156	980
10 x 42 B/GA	10 x	42	4,2	20	56-78	20,5	9,7	100	IF	1	7	147	176	1090
8 x 42	8 x	42	5,3	19,5	56-72	18,3	2,5	115	CF	1	±3,0	129	154	670
10 x 42	10 x	42	4,2	15,5	56-72	20,5	2,5	105	CF	1	±3,0	129	154	680
Compact Binoculars														
8 x 21 mono	8	24	2,6	9	-	13	2	110	IF	*	-11,5 to +36,5	46	46	80

Illustrations used in the catalogue may differ from the real products/ articles. No liability shall be assumed for product changes, especially in the course of technical enhancements, as well as model changes or printing errors. For printing reasons, the colour reproduction in the catalogue may differ from the original colour of the products/articles.

NOBLEX GmbH
 Seerasen 2
 D-98673 Eisfeld
 fon +49 (0) 3686 371-0
 fax +49 (0) 3686 371-201
 info@noblex-germany.com
 www.noblex-germany.com

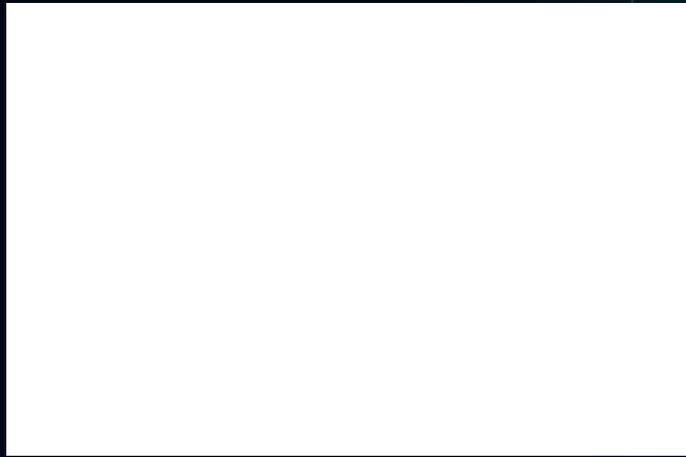

NOBLEX GmbH

Seerasen 2

D-98673 Eisfeld

fon +49 (0) 3686 371-0

fax +49 (0) 3686 371-201

info@noblex-germany.com

www.noblex-germany.com

Release 03/2019

Made in
Germany